



**300C, 350C, 400C, 500C**




**601SC, 602SC, 600C**

**ECONOMY AND MEDIUM ROTARY CUTTERS**

MODEL #	APPROX BLADE TIP SPEED FPM	SUGGESTED HORSE POWER	DESCRIPTION	APPROX WT.
300C	9,818	10-45	3' Economy Cutter - 36"	433 lbs.
350C	11,777	10-45	3 1/2' Economy Cutter - 42"	458 lbs.
400C	13,087	15-45	4' Economy Cutter - 48"	518 lbs.
500C	12,463	25-45	5' Economy Cutter - 60"	579 lbs.
601SC	14,955	40-65	6' Economy Cutter - 72"	710 lbs.
602SC	14,853	40-65	6' Economy Cutter - 72"	746 lbs.
600C	14,853	40-75	6' Medium Cutter - 72"	828 lbs.
M36C	9,818	10-45	3' Medium Cutter - 36"	433 lbs.
M42C	11,777	10-45	3 1/2' Medium Cutter -42"	467 lbs.
M48C	13,087	15-45	4' Medium Cutter - 48"	522 lbs.
M60C	12,463	25-45	5' Medium Cutter - 60"	595 lbs.
M72SC	14,955	40-65	6' Medium Cutter - 72"	753 lbs.

- Heavy angle iron frame, all models except M series
- Flat bar cross braced frame on M series
- Saucer-shaped blade carrier w/10 GA. pan and 1/2"X4" bar on 3',4', 5' models, 7 GA. pan on 601SC, 602SC, & M72SC, 1/4" pan with 1"X4" bar on 600C.
- Cast wheel hub w/1 1/4" fork shaft- all models except 600C. 1 1/2" fork shaft on 600C
- 45 H.P. gearbox 3' & 4' models, 55 H.P. 5' models
- 65 H.P. gearbox on 601SC & M72 SC

- 12 GA. deck w/7 1/2" sides on all models except 600C
- 10 gauge deck with 8 1/2" sides on 600C
- Laminated rubber tire
- Category 4 shearpin driveshaft -Standard, except 6' models
- Torque limiter optional on all models
- Category 6 shearpin driveshaft on 6' models
- 1/2"X3" blades - 3',4' & 5' models
- 1/2"X3 1/2" blades - 6' models
- 100 H.P. gearbox on 602SC & 600C
- 3 point hitch w/cat.1 lift pins and slotted top link hole
- All models are quick hitch compatible

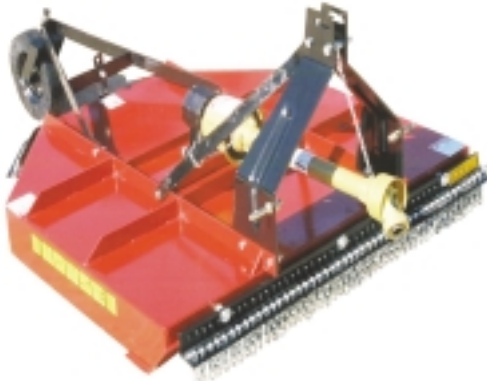

**M60C**



**M36C, M42C, M48C,**



**M 72SC**

All Howse Rotary Cutters come standard with chain guards. However, they may be purchased without chain guards if the customer prefers. Howse recommends chain guards on all Howse Rotary Cutters.

